


GROUP OF DOZING MODULES
BACK VIEW

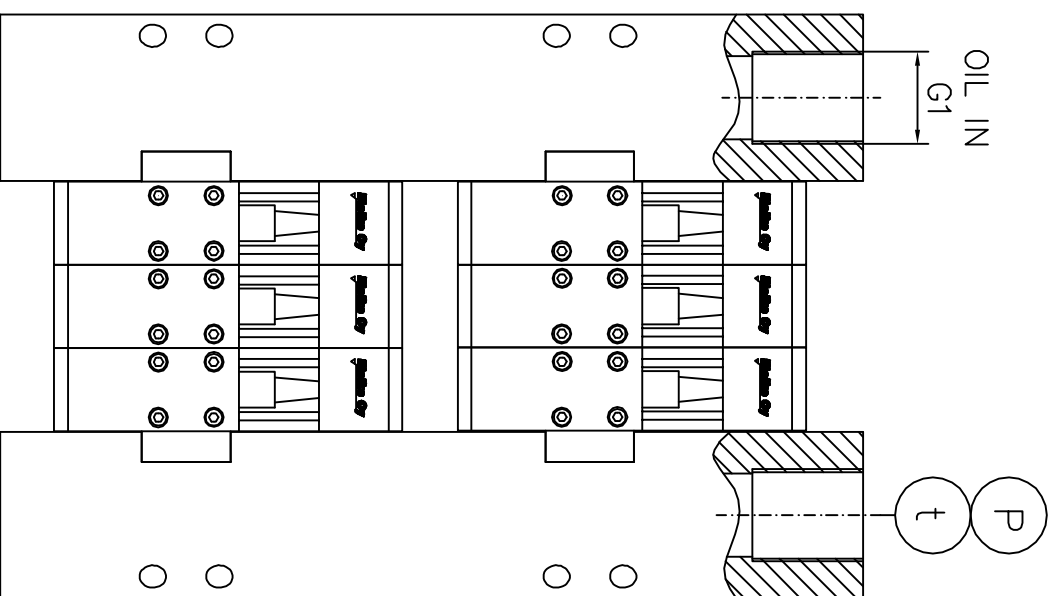

OIL DOZING DEVICE TBD 3

Dozing range: 0,2 - 3 l/min

Error flow rate: 0,2 - 0,5 l/min, adjustable

To one framework can be installed 1-18 (24) pcs of dozing devices.

Oil flow control is done by computer or logic control by determining the opening and closing time of the control valve.

The flow rate of each dozing device can be determined individually.

The effect of oil temperature to the viscosity of oil and the effect of pressure to the flow rate as well as the need for lubrication of the lubricated piece of equipment is taken to account when determining the oil flow rate of oil.

Valmistaja	Kokoonp.ryhmä		Yleistoleranssi	Suhte	
	Massa	Yleistoleranssi		Piirt.	25.11.2008
	Lask.			Tark.	
	Punn.			Hyv.	
Nimitys		Piiir.n:o		Muuutos	
OIL DOZING DEVICE		100244			
TBD-3		Tiedoston nimi			
Etolko Oy					